


EM020144967US

I hereby certify that this paper (along with any paper referred to as being attached or enclosed) is being deposited with the U.S. Postal Service as Express Mail, Airbill No. EM 020144967 US, on the date shown below in an envelope addressed to: MS Issue Fee, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Dated: June 26, 2007 Signature:   
(Rebecca Butler Guinan)

Docket No.: 68349-00010USPX  
(PATENT)

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Patent Application of:  
Carles Puente Baliarda et al.

Application No.: 10/822,933

Confirmation No.: 4450

Filed: April 13, 2004

Art Unit: 2821

For: LOADED ANTENNA

Examiner: M. C. Wimer

**TRANSMITTAL LETTER**

MS Issue Fee  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Dear Sir:

Enclosed are the following items for filing in connection with the above-referenced Patent Application:

1. Part B – Fee(s) Transmittal (1 page)
2. Claim for Priority and Submission of Document(s) (1 page)

Our check in the amount of \$1,700.00 covering the required fees is enclosed. The Director is hereby authorized to charge any deficiency in the fees filed, asserted to be filed or which should have been filed herewith (or with any paper hereafter filed in this application by

Application No.: 10/822,933

Docket No.: 68349-00010USPX

this firm) to our Deposit Account No. 23-2426, under Order No. 68349-00010USPX. A duplicate copy of this paper is enclosed.

Dated: June 26, 2007

Respectfully submitted,

By 

Shoaib A. Mithani

Registration No.: L0067

WINSTEAD PC

P.O. Box 50784

Dallas, Texas 75201

(214) 745-5400

Attorneys For Applicant



I hereby certify that this paper (along with any paper referred to as being attached or enclosed) is being deposited with the U.S. Postal Service as Express Mail, Airbill No. EM020144967 US, on the date shown below in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Dated: June 26, 2007

Signature: \_\_\_\_\_

(Rebecca Butler-Guinan)

Docket No.: 68349-00010USPX  
(PATENT)

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Patent Application of:  
Carles Puente Baliarda et al.

Application No.: 10/822,933

Confirmation No.: 4450

Filed: April 13, 2004

Art Unit: 2821

For: LOADED ANTENNA

Examiner: M. C. Wimer

**CLAIM FOR PRIORITY AND SUBMISSION OF DOCUMENTS**

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Dear Sir:

Applicants previously claimed priority under 35 U.S.C. 119 based on the following prior foreign application filed in the following foreign country on the date indicated:

<u>Country</u>	<u>Application No.</u>	<u>Date</u>
PCT	PCT/EP01/11914	October 16, 2001

In support of this claim, a certified copy of the said original foreign application is filed herewith.

Dated: June 26, 2007

Respectfully submitted,

By \_\_\_\_\_

Shoaib A. Mithani

Registration No.: L0067

WINSTEAD PC

P.O. Box 50784

Dallas, Texas 75201

(214) 745-5400

Attorneys For Applicant

Europäisches  
Patentamt

European Patent  
Office

Office européen  
des brevets



### Bescheinigung

Die angehefteten Unterlagen  
stimmen mit der ursprünglich  
eingereichten Fassung der auf  
dem nächsten Blatt bezeichneten  
internationalen Patentanmeldung  
überein.

### Certificate

The attached documents  
are exact copies of  
the international patent  
application described on the  
following page, as originally  
filed

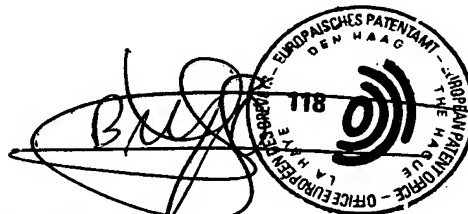
### Attestation

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de la  
demande de brevet internationale  
spécifiée à la page suivante.

Den Haag, den  
The Hague,  
La Haye, le

15-06-2007

Der Präsident des Europäischen Patentamts, i.A.  
For the President of the European Patent Office  
Le Président de l'Office européen des brevets, p.o.



BRYNER, Yocline

Patentanmeldung Nr. PCT/EP2001/11914  
Patent application no.  
Demande de brevet n°



**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

---

Anmeldenummer :  
Application no. : PCT/EP 2001/11914  
Demande n° :

Anmelder : FRACTUS, S.A. - Sant Cugat del Valles (Barcelona), Spain  
Applicant(s) : PUENTE BALIARDA, Carles - Sant Cugat del Valles (Barcelona), Spain  
Demandeur(s) : (US only)  
: SOLER CASTANY, Jordi - Sant Cugat del Valles (Barcelona), Spain (US only)

Bezeichnung der Erfindung :  
Title of the invention : LOADED ANTENNA  
Titre d'invention :

Anmeldetag :  
Date of filing : 16 October 2001 (16.10.2001)  
Date de dépôt :

In Anspruch genommene Priorität(en) :  
Priority(ies) claimed :  
Priorité(s) revendiquée(s) :

Staat	:	Tag	:	Aktenzeichen	:
State	:	Date	:	File no.	:
Pays	:	Date	:	Numéro de dépôt	:

Benennung von Vertragsstaaten : Siehe Formblatt PCT/RO/101 (beigefügt)  
Designation of contracting states : See Form PCT/RO/101 (enclosed)  
Désignation d'états contractants : Voir Formulaire PCT/RO/101 (ci-joint)

## PCT REQUEST

Original (for SUBMISSION) - printed on 15.10.2001 12:46:17 PM

<b>III-2</b>	<b>Applicant and/or inventor</b>		
<b>III-2-1</b>	This person is:	<b>applicant and inventor</b>	
<b>III-2-2</b>	Applicant for	<b>US only</b>	
<b>III-2-4</b>	Name (LAST, First)	<b>SOLER CASTANY, Jordi</b>	
<b>III-2-5</b>	Address:	<b>Alcalde Barnils s/n</b> <b>Edificio TESTA, Módulo C, 3º</b> <b>Parque Empresarial Sant Joan</b> <b>08190 SANT CUGAT DEL VALLES (Barcelona)</b> <b>Spain</b>	
<b>III-2-6</b>	State of nationality	<b>ES</b>	
<b>III-2-7</b>	State of residence	<b>ES</b>	
<b>IV-1</b>	<b>Agent or common representative; or address for correspondence</b>		
	The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:	<b>agent</b>	
<b>IV-1-1</b>	Name (LAST, First)	<b>CARPINTERO LOPEZ, Francisco</b>	
<b>IV-1-2</b>	Address:	<b>HERRERO &amp; ASOCIADOS, S.L.</b> <b>Alcalá, 35</b> <b>28014 Madrid</b> <b>Spain</b>	
<b>IV-1-3</b>	Telephone No.	<b>+34 -91 522 74 20</b>	<b>EPO - DG 1</b>
<b>IV-1-4</b>	Facsimile No.	<b>+34 -91 522 62 49</b>	<b>10. 01. 2002</b>
<b>IV-1-5</b>	e-mail	<b>info@herreroasociados.es</b>	<b>(91)</b>
<b>V</b>	<b>Designation of States</b>		
<b>V-1</b>	Regional Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	<b>AP: GH GM KE LS MW MZ SD SL SZ TZ UG ZW</b> <b>and any other State which is a Contracting State of the Harare Protocol and of the PCT</b> <b>EA: AM AZ BY KG KZ MD RU TJ TM and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT</b> <b>EP: AT BE CH&amp;LI CY DE DK ES FI FR GB GR IE IT LU MC NL PT SE TR and any other State which is a Contracting State of the European Patent Convention and of the PCT</b> <b>OA: BF BJ CF CG CI CM GA GN GQ GW ML MR NE SN TD TG and any other State which is a member State of OAPI and a Contracting State of the PCT</b>	

## PCT REQUEST

2001398

Original (for SUBMISSION) - printed on 15.10.2001 12:46:17 PM

<b>V-2</b>	National Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	<b>AE AG AL AM AT AU AZ BA BB BG BR BY BZ</b> <b>CA CH&amp;LI CN CO CR CU CZ DE DK DM DZ EC</b> <b>EE ES FI GB GD GE GH GM HR HU ID IL IN</b> <b>IS JP KE KG KP KR KZ LC LK LR LS LT LU</b> <b>LV MA MD MG MK MN MW MX MZ NO NZ PH PL</b> <b>PT RO RU SD SE SG SI SK SL TJ TM TR TT</b> <b>TZ UA UG US UZ VN YU ZA ZW</b>	
<b>V-5</b>	<b>Precautionary Designation Statement</b> In addition to the designations made under items V-1, V-2 and V-3, the applicant also makes under Rule 4.9(b) all designations which would be permitted under the PCT except any designation(s) of the State(s) indicated under item V-6 below. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit.		
<b>V-6</b>	Exclusion(s) from precautionary designations	<b>NONE</b>	
<b>VI</b>	Priority claim	<b>NONE</b>	
<b>VII-1</b>	International Searching Authority Chosen	<b>European Patent Office (EPO) (ISA/EP)</b>	
<b>VIII</b>	Declarations	Number of declarations	
<b>VIII-1</b>	Declaration as to the identity of the inventor	-	
<b>VIII-2</b>	Declaration as to the applicant's entitlement, as at the international filing date, to apply for and be granted a patent	-	
<b>VIII-3</b>	Declaration as to the applicant's entitlement, as at the international filing date, to claim the priority of the earlier application	-	
<b>VIII-4</b>	Declaration of inventorship (only for the purposes of the designation of the United States of America)	-	
<b>VIII-5</b>	Declaration as to non-prejudicial disclosures or exceptions to lack of novelty	-	
<b>IX</b>	Check list	number of sheets	electronic file(s) attached
<b>IX-1</b>	Request (including declaration sheets)	<b>4</b>	-
<b>IX-2</b>	Description	<b>13</b>	-
<b>IX-3</b>	Claims	<b>4</b>	-
<b>IX-4</b>	Abstract	<b>1</b>	<b>EZABST00.TXT</b>
<b>IX-5</b>	Drawings	<b>15</b>	-
<b>IX-7</b>	TOTAL	<b>37</b>	

**LOADED ANTENNA****OBJECT OF THE INVENTION**

5

The present invention relates to a novel loaded antenna which operates simultaneously at several bands and featuring a smaller size with respect to prior art antennas.

10 The radiating element of the novel loaded antenna consists on two different parts: a conducting surface with a polygonal, space-filling or multilevel shape; and a loading structure consisting on a set of strips connected to said first conducting surface.

15 The invention refers to a new type of loaded antenna which is mainly suitable for mobile communications or in general to any other application where the integration of telecom systems or applications in a single small antenna is important.

20

**BACKGROUND OF THE INVENTION**

The growth of the telecommunication sector, and in particular, the expansion of personal mobile communication systems are driving the engineering efforts to  
25 develop multiservice (multifrequency) and compact systems which require multifrequency and small antennas. Therefore, the use of a multisystem small antenna with a multiband and/or wideband performance, which provides coverage of the maximum number of services, is nowadays of notable interest since it permits telecom operators to reduce their costs and to minimize the environmental  
30 impact.



Most of the multiband reported antenna solutions use one or more radiators or branches for each band or service. An example is found in U.S. Patent No. 09/129176 entitled "Multiple band, multiple branch antenna for mobile phone".

- 5 One of the alternatives which can be of special interest when looking for antennas with a multiband and/or small size performance are multilevel antennas, Patent WO0122528 entitled "Multilevel Antennas", and miniature space-filling antennas, Patent WO0154225 entitled "Space-filling miniature antennas".
- 10 A variety of techniques used to reduce the size of the antennas can be found in the prior art. In 1886, there was the first example of a loaded antenna; that was, the loaded dipole which Hertz built to validate Maxwell equations.

- 15 A.G. Kandoian (A.G.Kandoian, "Three new antenna types and their applications, Proc. IRE, vol. 34, pp. 70W-75W, February 1946) introduced the concept of loaded antennas and demonstrated how the length of a quarter wavelength monopole can be reduced by adding a conductive disk at the top of the radiator. Subsequently, Goubau presented an antenna structure top-loaded with several capacitive disks interconnected by inductive elements which provided a smaller
- 20 size with a broader bandwidth, as is illustrated in U.S. Patent No.3,967,276 entitled "Antenna structures having reactance at free end".

- 25 More recently, U.S. Patent No.5,847,682 entitled "Top loaded triangular printed antenna" discloses a triangular-shaped printed antenna with its top connected to a rectangular strip. The antenna features a low-profile and broadband performance. However, none of these antenna configurations provide a multiband behaviour. In Patent No. WO0122528 entitled "Multilevel Antennas", another patent of the present inventors, there is a particular case of a top-loaded antenna with an inductive loop, which was used to miniaturize an antenna for a dual frequency
- 30 operation. Also, W.Dou and W.Y.M.Chia (W.Dou and W.Y.M.Chia, "Small broadband stacked planar monopole", Microwave and Optical Technology Letters, vol. 27, pp. 288-289, November 2000) presented another particular antecedent of

a top-loaded antenna with a broadband behavior. The antenna was a rectangular monopole top-loaded with one rectangular arm connected at each of the tips of the rectangular shape. The width of each of the rectangular arms is on the order of the width of the fed element, which is not the case of the present invention.

5

## SUMMARY OF THE INVENTION

10 The key point of the present invention is the shape of the radiating element of the antenna, which consists on two main parts: a conducting surface and a loading structure. Said conducting surface has a polygonal, space-filling or multilevel shape and the loading structure consists on a conducting strip or set of strips connected to said conducting surface. According to the present invention, at least one loading strip must be directly connected at least at one point on the perimeter  
15 of said conducting surface. Also, circular or elliptical shapes are included in the set of possible geometries of said conducting surfaces since they can be considered polygonal structures with a large number of sides.

20 Due to the addition of the loading structure, the antenna can feature a small and multiband, and sometimes a multiband and wideband, performance. Moreover, the multiband properties of the loaded antenna (number of bands, spacing between bands, matching levels, etc) can be adjusted by modifying the geometry of the load and/or the conducting surface.

25 This novel loaded antenna allows to obtain a multifrequency performance, obtaining similar radioelectric parameters at several bands.

The loading structure can consist for instance on a single conducting strip. In this particular case, said loading strip must have one of its two ends connected to a  
30 point on the perimeter of the conducting surface (i.e., the vertices or edges). The other tip of said strip is left free in some embodiments while, in other embodiments it is also connected at a point on the perimeter of said conducting surface.

The loading structure can include not only a single strip but also a plurality of loading strips located at different locations along its perimeter.

5 The geometries of the loads that can be connected to the conducting surface according to the present invention are:

- 10 a) A curve composed by a minimum of two segments and a maximum of nine segments which are connected in such a way that each segment forms an angle with their neighbours, i.e., no pair of adjacent segments define a larger straight segment.
- b) A straight segment or strip
- c) A straight strip with a polygonal shape
- 15 d) A space-filling curve, Patent No. PCT/ES00/00411 entitled "Space-filling miniature antennas".

In some embodiments, the loading structure described above is connected to the conducting surface while in other embodiments, the tips of a plurality of the loading strips are connected to other strips. In those embodiments where a new  
20 loading strip is added to the previous one, said additional load can either have one tip free of connection, or said tip connected to the previous loading strip, or both tips connected to previous strip or one tip connected to previous strip and the other tip connected to the conducting surface.

25 There are three types of geometries that can be used for the conducting surface according to the present invention:

- 30 a) A polygon (i.e., a triangle, square, trapezoid, pentagon, hexagon, etc. or even a circle or ellipse as a particular case of polygon with a very large number of edges).
- b) A multilevel structure, Patent No. WO0122528 entitled "Multilevel Antennas".

c) A solid surface with an space-filling perimeter.

In some embodiments, a central portion of said conducting surface is even removed to further reduce the size of the antenna. Also, it is clear to those skilled in the art that the multilevel or space-filling designs in configurations b) and c) can be used to approximate, for instance, ideal fractal shapes.

Fig.1 and Fig.2 show some examples of the radiating element for a loaded antenna according to the present invention. In drawings 1 to 3 the conducting surface is a trapezoid while in drawings 4 to 7 said surface is a triangle. It can be seen that in these cases, the conducting surface is loaded using different strips with different lengths, orientations and locations around the perimeter of the trapezoid, Fig.1. Besides, in these examples the load can have either one or both of its ends connected to the conducting surface, Fig.2.

The main advantage of this novel loaded antenna is two-folded:

- The antenna features a multiband or wideband performance, or a combination of both.
- Given the physical size of radiating element, said antenna can be operated at a lower frequency than most of the prior art antennas.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig.1 shows a trapezoid antenna loaded in three different ways using the same structure; in particular, a straight strip. In case 1, one straight strip, the loading structure (1a) and (1b), is added at each of the tips of the trapezoid, the conducting surface (1c). Case 2 is the same as case 1, but using strips with a smaller length and located at a different position around the perimeter of the conducting surface. Case 3, is a more general case where several strips are added to two different locations on the conducting surface. Drawing 4 shows a

example of a non-symmetric loaded structure and drawing 5 shows an element where just one slanted strip has been added at the top of the conducting surface. Finally, cases 6 and 7 are examples of geometries loaded with a strip with a triangular and rectangular shape and with different orientations. In these cases,  
 5 the loads have only one of their ends connected to the conducting surface.

Fig. 2 shows a different particular configuration where the loads are curves which are composed by a maximum of nine segments in such a way that each segment forms an angle with their neighbours, as it has been mentioned before. Moreover,  
 10 in drawings 8 to 12 the loads have both of their ends connected to the conducting surface. Drawings 8 and 9, are two examples where the conducting surface is side-loaded. Cases 13 and 14, are two cases where a rectangle is top-loaded with an open-ended curve, shaped as is mentioned before, with the connection made through one of the tips of the rectangle. The maximum width of the loading strips  
 15 is smaller than a quarter of the longest edge of the conducting surface.

Fig.3 shows a square structure top-loaded with three different space-filling curves. The curve used to load the square geometry, case 16, is the well-known Hilbert curve.  
 20

Fig.4 shows three examples of the top-loaded antenna, where the load consist of two different loads that are added to the conducting surface. In drawing 19, a first load, built with three segments, is added to the trapezoid and then a second load is added to the first one.  
 25

Fig. 5 includes some examples of the loaded antenna where a central portion of the conducting surface is even removed to further reduce the size of the antenna.

Fig. 6 shows the same loaded antenna described in Fig.1, but in this case as the  
 30 conducting surface a multilevel structure is used.

Fig.7 shows another example of the loaded antenna, similar to those described in Fig.2. In this case, the conducting surface consist of a multilevel structure. Drawings 31,32, 34 and 35 use different shapes for the loading but in all cases the load has both ends connected to the conducting surface. Case 33 is an example of an open-ended load added to a multilevel conducting surface.

Fig.8 presents some examples of the loaded antenna, similar to those depicted in Fig.3 and 4, but using a multilevel structure as the conducting surface. Illustrations 36, 37 and 38, include a space-filling top-loading curve, while the rest of the drawings show three examples of the top-loaded antenna with several levels of loadings. Drawing 40 is an example where three loads have been added to the multilevel structure. More precisely, the conducting surface is firstly loaded with curve (40a), next with curves (40b) and (40c). Curve (40a) has both ends connected to conducting surface, curve (40b) has both ends connected to the previous load (40a), and load (40c), formed with two segments, has one end connected to load (40a) and the other to the load (40b).

Fig.9 shows three cases where the same multilevel structure, with the central portions of the conducting surface removed, which is loaded with three different type of loads; those are, a space-filling curve, a curve with a minimum of two segments and a maximum of nine segments connected in such a way mentioned just before, and finally a load with two similar levels.

Fig.10 shows two configurations of the loaded antenna which include three conducting surfaces, one of them bigger than the others. Drawing 45 shows a triangular conducting surface (45a) which is connected to two smaller circular conducting surfaces (45b) and (45c) through one conducting strip (45d) and (45e). Drawing 46 is a similar configuration to drawing 45 but the bigger conducting surface is a multilevel structure.

Fig.11 shows other particular cases of the loaded antenna. They consist of a monopole antenna comprising a conducting or superconducting ground plane (48)

with an opening to allocate a coaxial cable (47) with its outer conductor connected to said ground plane and the inner conductor connected to the loaded antenna. The loaded radiator can be optionally placed over a supporting dielectric (49).

- 5 Fig.12 shows a top-loaded polygonal radiating element (50) mounted with the same configuration as the antenna in Fig. 12. The radiating element radiator can be optionally placed over a supporting dielectric (49). The lower drawing shows a configuration wherein the radiating element is printed on one of the sides of a dielectric substrate (49) and also the load has a conducting surface on the other  
10 side of the substrate (51).

Fig.13 shows a particular configuration of the loaded antenna. It consists of a dipole wherein each of the two arms includes two straight strip loads. The lines at the vertex of the small triangles (50) indicate the input terminal points. The two  
15 drawings display different configurations of the same basic dipole; in the lower drawing the radiating element is supported by a dielectric substrate (49).

Fig.14 shows, in the upper drawing, an example of the same dipole antenna side-loaded with two strips but fed as an aperture antenna. The lower drawing is the  
20 same loaded structure wherein the conductor defines the perimeter of the loaded geometry.

Fig.15 shows a patch antenna wherein the radiating element is a multilevel structure top-loaded with two strip arms, upper drawing. Also, the figure shows an  
25 aperture antenna wherein the aperture (59) is practiced on a conducting or superconducting structure (63), said aperture being shaped as a loaded multilevel structure.

Fig.16 shows a frequency selective surface wherein the elements that form the  
30 surface are shaped as a multilevel loaded structure.

## DETAILED DESCRIPTION OF SOME PREFERRED EMBODIMENTS

A preferred embodiment of the loaded antenna is a monopole configuration as shown in Fig.11. The antenna includes a conducting or superconducting counterpoise or ground plane (48). A handheld telephone case, or even a part of the metallic structure of a car or train can act as such a ground counterpoise. The ground and the monopole arm (here the arm is represented with the loaded structure (26), but any of the mentioned loaded antenna structure could be taken instead) are excited as usual in prior art monopole by means of, for instance, a transmission line (47). Said transmission line is formed by two conductors, one of the conductors is connected to the ground counterpoise while the other is connected to a point of the conducting or superconducting loaded structure. In Fig.11, a coaxial cable (47) has been taken as a particular case of transmission line, but it is clear to any skilled in the art that other transmission lines (such as for instance a microstrip arm) could be used to excite the monopole. Optionally, and following the scheme just described, the loaded monopole can be printed over a dielectric substrate (49).

Another preferred embodiment of the loaded antenna is a monopole configuration as shown in Fig.12. The assembly of the antenna (feeding scheme, ground plane, etc) is the same as the considered in the embodiment described in Fig.11. In the present figure, there is another example of the loaded antenna. More precisely, it consists of a trapezoid element top-loaded with one of the mentioned curves. In this case, one of the main differences is that, being the antenna edged on dielectric substrate, it also includes a conducting surface on the other side of the dielectric (51) with the shape of the load. This preferred configuration allows to miniaturize the antenna and also to adjust the multiband parameters of the antenna, such as the spacing the between bands.

Fig.13 describes a preferred embodiment of the invention. A two-arm antenna dipole is constructed comprising two conducting or superconducting parts, each part being a side-loaded multilevel structure. For the sake of clarity but without loss of generality, a particular case of the loaded antenna (26) has been chosen



here; obviously, other structures, as for instance, those described in Fig. 2,3,4,7 and 8, could be used instead. Both, the conducting surfaces and the loading structures are lying on the same surface. The two closest apexes of the two arms form the input terminals (50) of the dipole. The terminals (50) have been  
5 drawn as conducting or superconducting wires, but as it is clear to those skilled in the art, such terminals could be shaped following any other pattern as long as they are kept small in terms of the operating wavelength. The skilled in the art will notice that, the arms of the dipoles can be rotated and folded in different ways to finely modify the input impedance or the radiation properties of the  
10 antenna such as, for instance, polarization.

Another preferred embodiment of a loaded dipole is also shown in Fig.13 where the conducting or superconducting loaded arms are printed over a dielectric substrate (49); this method is particularly convenient in terms of cost and  
15 mechanical robustness when the shape of the applied load packs a long length in a small area and when the conducting surface contains a high number of polygons, as happens with multilevel structures. Any of the well-known printed circuit fabrication techniques can be applied to pattern the loaded structure over the dielectric substrate. Said dielectric substrate can be, for instance, a glass-  
20 fibre board, a teflon based substrate (such as Cuclad®) or other standard radiofrequency and microwave substrates (as for instance Rogers 4003® or Kapton®). The dielectric substrate can be a portion of a window glass if the antenna is to be mounted in a motor vehicle such as a car, a train or an airplane, to transmit or receive radio, TV, cellular telephone (GSM900,  
25 GSM1800, UMTS) or other communication services electromagnetic waves. Of course, a balun network can be connected or integrated at the input terminals of the dipole to balance the current distribution among the two dipole arms.

The embodiment (26) in Fig.14 consist on an aperture configuration of a loaded  
30 antenna using a multilevel geometry as the conducting surface. The feeding techniques can be one of the techniques usually used in conventional aperture

antennas. In the described figure, the inner conductor of the coaxial cable (53) is directly connected to the lower triangular element and the outer conductor to the rest of the conductive surface. Other feeding configurations are possible, such as for instance a capacitive coupling.

5

Another preferred embodiment of the loaded antenna is a slot loaded monopole antenna as shown in the lower drawing in Fig.14. In this figure the loaded structure forms a slot or gap (54) impressed over a conducting or superconducting sheet (52). Such sheet can be, for instance, a sheet over a dielectric substrate in a printed circuit board configuration, a transparent  
10 conductive film such as those deposited over a glass window to protect the interior of a car from heating infrared radiation, or can even be a part of the metallic structure of a handheld telephone, a car, train, boat or airplane. The feeding scheme can be any of the well known in conventional slot antennas and it does not become an essential part of the present invention. In all said two  
15 illustrations in Fig.14, a coaxial cable has been used to feed the antenna, with one of the conductors connected to one side of the conducting sheet and the other connected at the other side of the sheet across the slot. A microstrip transmission line could be used, for instance, instead of a coaxial cable.

20

Another preferred embodiment is described in Fig.15. It consists of a patch antenna, with the conducting or superconducting patch (58) featuring the loaded structure (the particular case of the loaded structure (59) has been used here but it is clear that any of the other mentioned structures could be used instead).  
25 The patch antenna comprises a conducting or superconducting ground plane (61) or ground counterpoise, and the conducting or superconducting patch which is parallel to said ground plane or ground counterpoise. The spacing between the patch and the ground is typically below (but not restricted to) a quarter wavelength. Optionally, a low-loss dielectric substrate (60) (such as  
30 glass-fibre, a teflon substrate such as Cuclad<sup>®</sup> or other commercial materials such as Rogers4003<sup>®</sup>) can be placed between said patch and ground counterpoise. The antenna feeding scheme can be taken to be any of the well-

known schemes used in prior art patch antennas, for instance: a coaxial cable with the outer conductor connected to the ground plane and the inner conductor connected to the patch at the desired input resistance point (of course the typical modifications including a capacitive gap on the patch around the coaxial  
5 connecting point or a capacitive plate connected to the inner conductor of the coaxial placed at a distance parallel to the patch, and so on, can be used as well); a microstrip transmission line sharing the same ground plane as the antenna with the strip capacitively coupled to the patch and located at a distance below the patch, or in another embodiment with the strip placed below  
10 the ground plane and coupled to the patch through a slot, and even a microstrip line with the strip co-planar to the patch. All these mechanisms are well known from prior art and do not constitute an essential part of the present invention. The essential part of the invention is the loading shape of the antenna which contributes to enhance the behavior of the radiator to operate simultaneously at  
15 several bands with a small size performance.

The same Fig.15 describes another preferred embodiment of the loaded antenna. It consist of an aperture antenna, said aperture being characterized by its loading added to a multilevel structure, said aperture being impressed over a  
20 conducting ground plane or ground counterpoise, said ground plane consisting, for example, of a wall of a waveguide or cavity resonator or a part of the structure of a motor vehicle (such as a car, a lorry, an airplane or a tank). The aperture can be fed by any of the conventional techniques such as a coaxial cable (61), or a planar microstrip or strip-line transmission line, to name a few.

25

Another preferred embodiment is described in Fig.16. It consists of a frequency selective surface (63). Frequency selective surfaces are essentially electromagnetic filters, which at some frequencies they completely reflect energy while at other frequencies they are completely transparent. In this  
30 preferred embodiment the selective elements (64), which form the surface (63), use the loaded structure (26), but any other of the mentioned loaded antenna structures can be used instead. At least one of the selective elements (64) has

the same shape of the mentioned loaded radiating elements. Besides this embodiment, another embodiment is preferred; this is, a loaded antenna where the conducting surface or the loading structure, or both, are shaped by means of one or a combination of the following mathematical algorithms: Iterated

5 Function Systems, Multi Reduction Copy Machine, Networked Multi Reduction Copy Machine.

CLAIMS

1.- A loaded antenna characterized in that the radiating element includes at least two parts, first part consisting on at least one conducting surface, second part being a loading structure, said loading structure consisting on at least a conducting strip, wherein at least one of said strips are connected at least at one point on the edge of said first conducting surface, and wherein the maximum width of said strip or strips is smaller than a quarter of the longest edge of first conducting surface.

2.- A loaded antenna according to claim 1 characterized in that the radiating element includes at least two parts, first part consisting on a conducting surface, second part being a loading structure, said loading structure consisting on at least a conducting strip, wherein the two tips of at least one of the conducting strips are connected at two points on the perimeter of said first conducting surface.

3.- A loaded antenna according to claim 1 or 2 wherein said first conducting surface and second loading structure are lying on the same flat or curved surface.

4.- A loaded antenna according to claim 1,2 or 3 comprising a conducting surface and at least a first and a second strip, wherein said first strip is connected at least at one point on the perimeter of said conducting surface, and wherein said second strip is connected at least by means of one of its tips to said first conducting strip.

5.- A loaded antenna according to claim 1,2,3 or 4 wherein the antenna includes at least a second conducting surface, said second surface featuring a smaller area than first conducting surface, and wherein at least one conducting strip is connected to first conducting surface at one end, and to second conducting surface at the other end

6.- A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4 or 5 wherein the perimeter of said conducting surface is

shaped chosen from the following set: triangular, square, rectangular, trapezoidal, pentagonal, hexagonal, heptagonal, octogonal, circular or elliptical.

5 7.- A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4 or 5 wherein at least a portion of said conducting surface is a multilevel structure.

10 8.- A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4,5,6 or 7 wherein the shape of at least one loading strip is a curve composed by a minimum of two segments and a maximum of nine segments which are connected in such a way that each segment forms an angle with their neighbours, i.e., no pair of adjacent segments define a larger straight segment.

15 9.- A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4,5,6 or 7 wherein the loading structure includes at least one straight strip, said strip having one end connected to a point on the edge of said conducting surface.

20 10.- A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4,5,6 or 7 wherein the shape of at least one loading strip is a space-filling curve.

25 11.- A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4,5,6 or 7 wherein at least one loading strip is a straight strip with a polygonal shape.

30 12.- A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4,5,6 or 7 wherein the loading structure includes at least two strips, with the first strip with one tip free of connection, or connected to the second strip, or both tips connected to the second strip or one tip connected to the second strip and the other tip connected to the conducting surface.

13.- A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4,5,6 or 7 wherein the loading structure consists on two or more strips connected at several points on the perimeter of said conducting surface.

14.- A loaded antenna according to claim 5,6 or 7 wherein at least the second conducting surface includes a loading structure according to claim 8,9,10,11,12 or 13.

15.- A loaded antenna including a conducting surface and a loading structure according to claim 1,2,3,4,5,6,7,8,9,10,11,12,13 or 14 wherein a central portion of the conducting surface is removed.

16.- A loaded antenna according to claims 1,2,3,4,5,6,7,8,9,10,11,12,13,14 or 15 wherein the antenna is a monopole, said monopole including a ground-plane or ground-counterpoise and a radiating element, said element including at least a conducting surface and a loading structure.

17.- A loaded antenna according to claims 1,2,3,4,5,6,7,8,9,10,11,12,13,14 or 15 wherein the antenna is a dipole including two arms, said arms including at least a conducting surface and a loading structure.

18.- A loaded antenna according to claims 16 or 17 where the radiating element is printed on one of the sides of a dielectric substrate and the load has a conducting surface on the other side of the substrate.

19.- A loaded antenna according to claims 1,2,3,4,5,6,7,8,9,10,11,12,13,14 or 15 wherein the antenna is a microstrip patch antenna and wherein the radiating patch of said antenna includes a conducting surface and a loading structure.

20.- A loaded antenna according to any of the preceding claims, characterized in that the antenna features a multiband behavior, a broadband behavior or a combination of both.

5 21.- A loaded antenna according to any of the preceding claims, characterized in that the antenna is shorter than a quarter of the central operating wavelength.

22.- A loaded antenna wherein the antenna is an aperture or slot antenna characterized in that the shape of the slot or aperture is the same as any of the  
10 shapes of the radiating elements of the loaded antennas described in the preceding claims.

23.- A loaded antenna radiating element described in any of the preceding claims which shape is used in at least one of the selective elements on a frequency  
15 selective surface.

24.- A loaded antenna according to any of the preceding claims, characterized in that the geometry of the surface, the loading structure or both are shaped by means of one or a combination of the following mathematical algorithms: Iterated  
20 Function Systems, Multi Reduction Copy Machine, Networked Multi Reduction Copy Machine.



**LOADED ANTENNA****ABSTRACT**

- 5 A novel loaded antenna is defined in the present invention. The radiating element of the loaded antenna consists of two different parts: a conducting surface and a loading structure. By means of this configuration, the antenna provides a small and multiband performance, and hence it features a similar behaviour through different frequency bands.

1/15



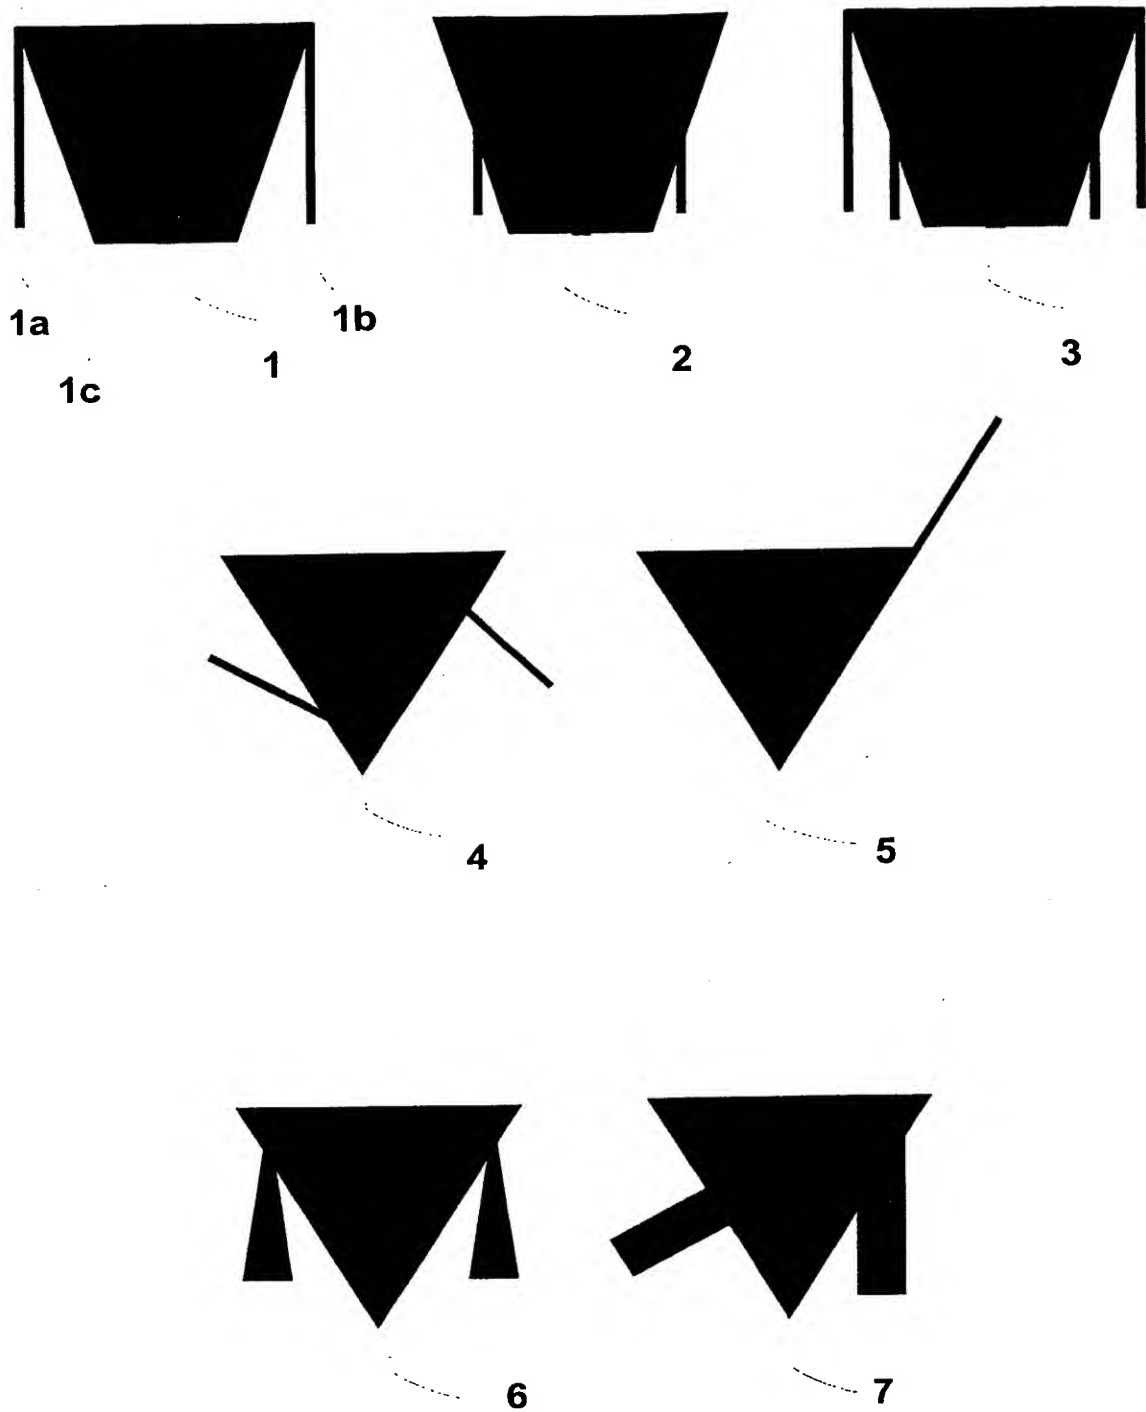


Fig.1


2/15





8

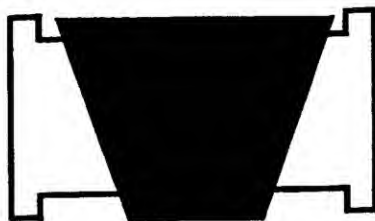


9




10

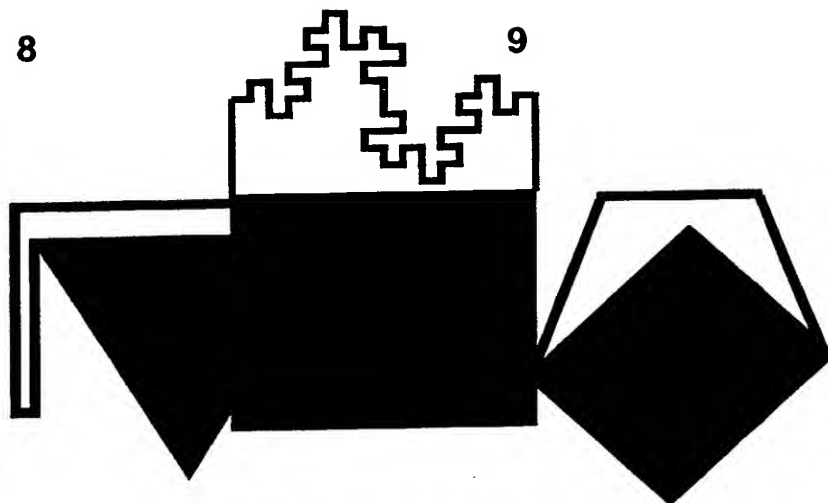

12

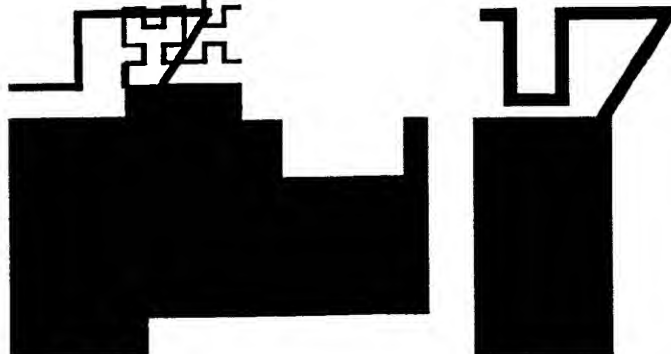

13

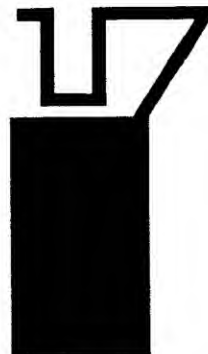

14

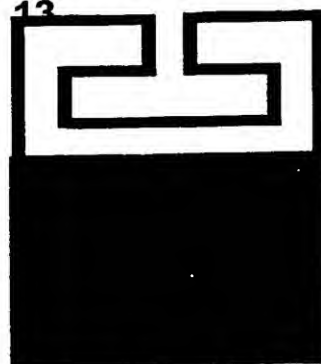


Fig.2

3/15

Fig.3



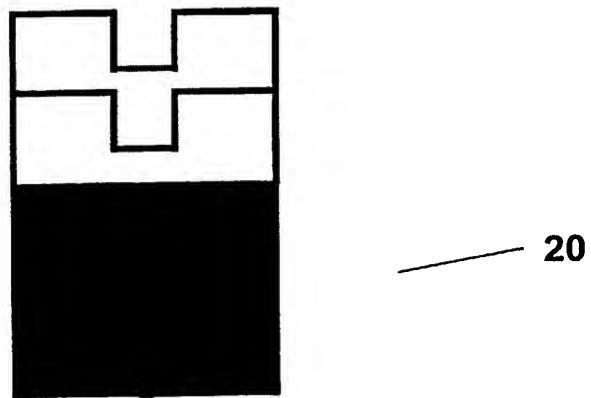
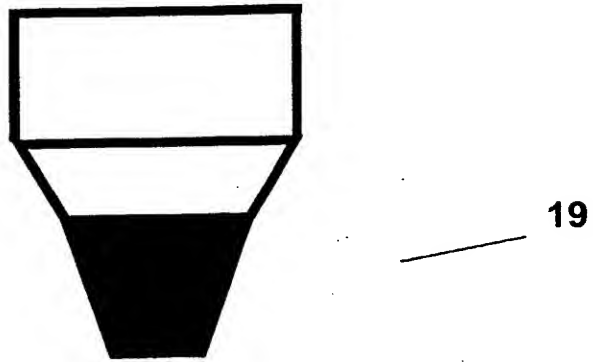
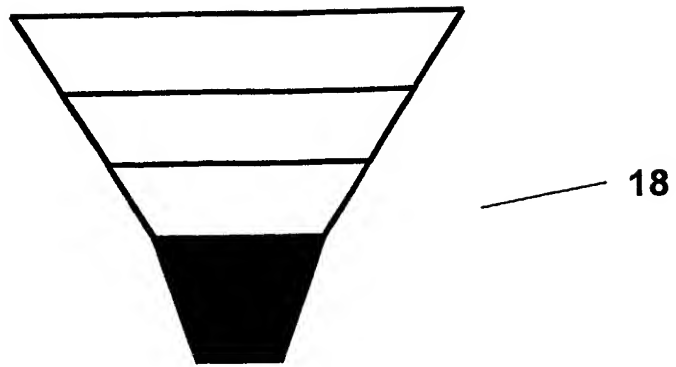


Fig.4

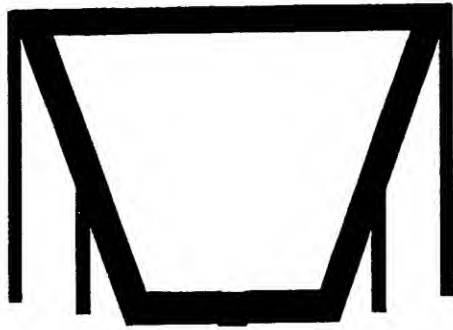
4/15




21

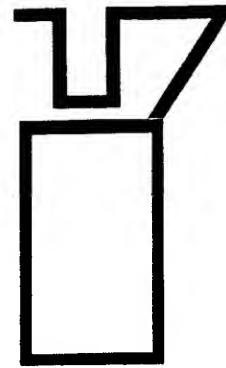

22

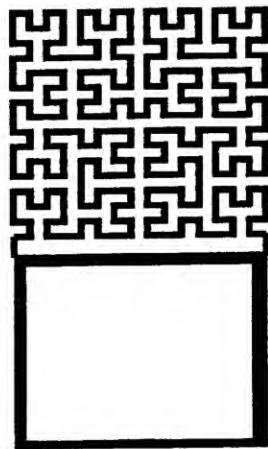

23

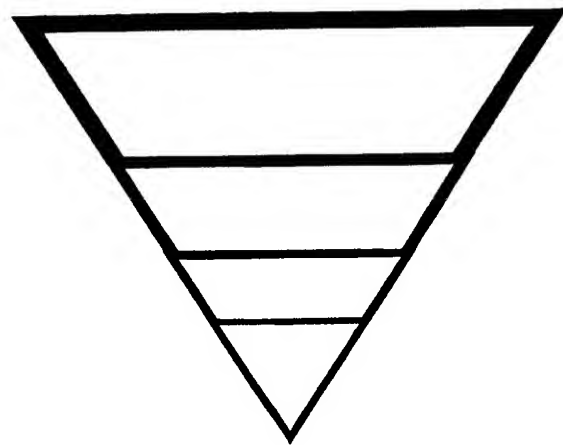

24

Fig.5


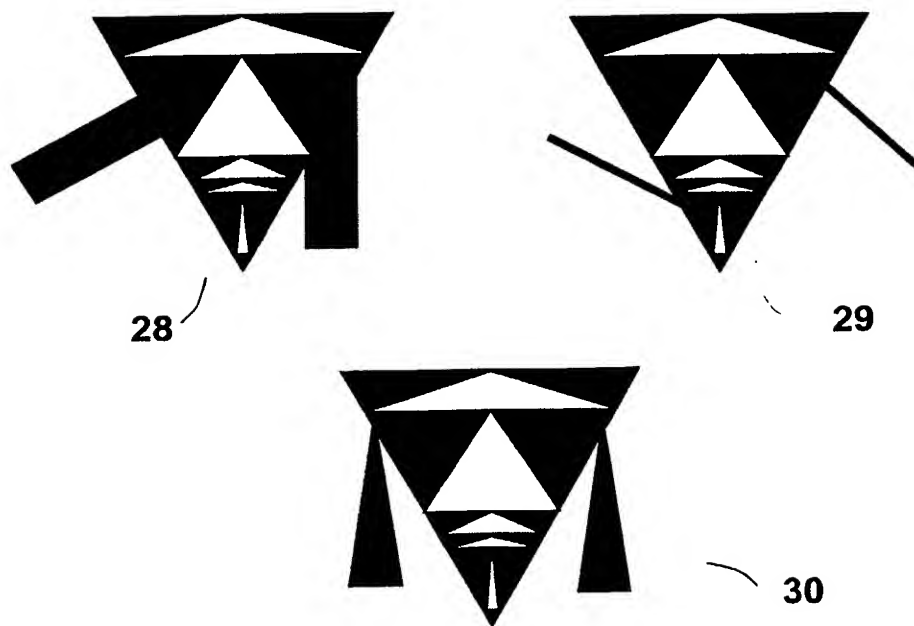
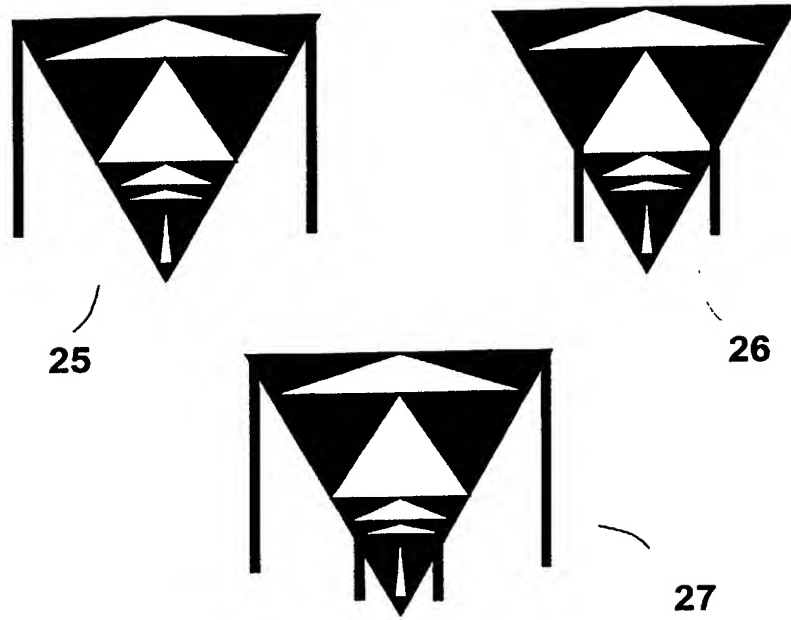




Fig.6

6/15

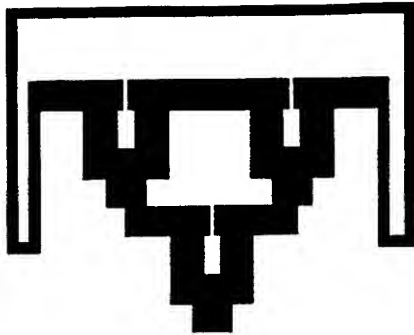31/




32/

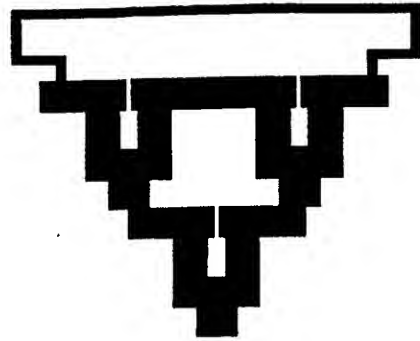


33

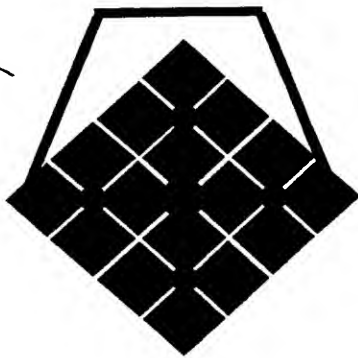34



34

35



35

7/15

Fig.7

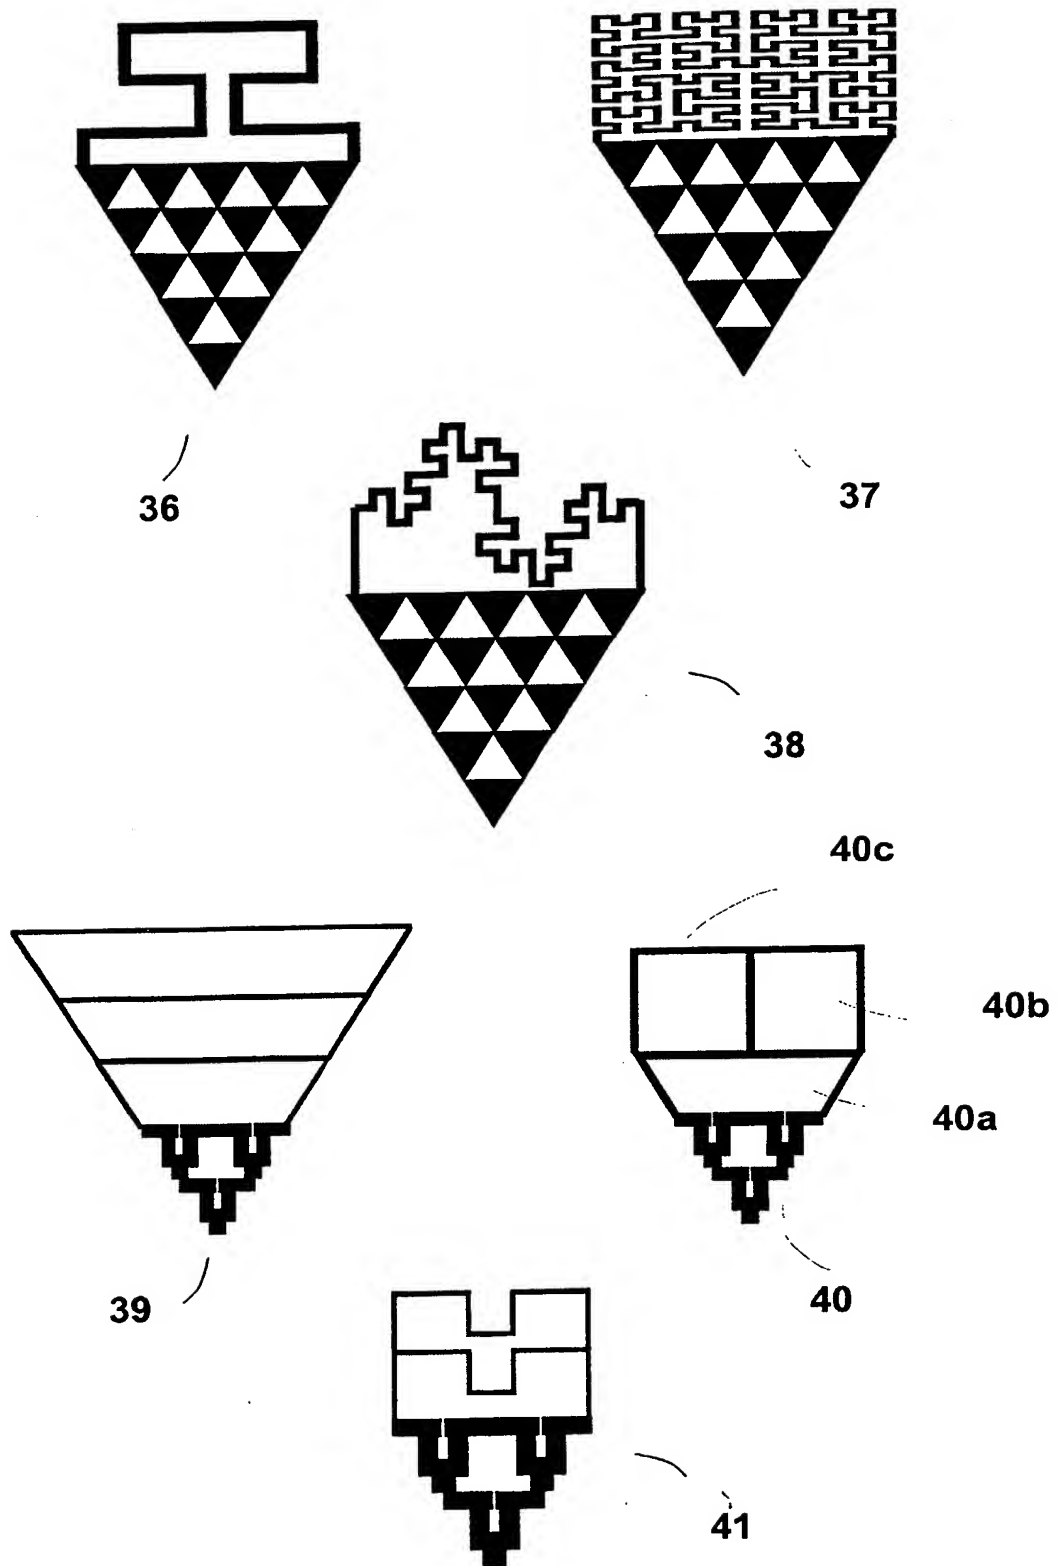
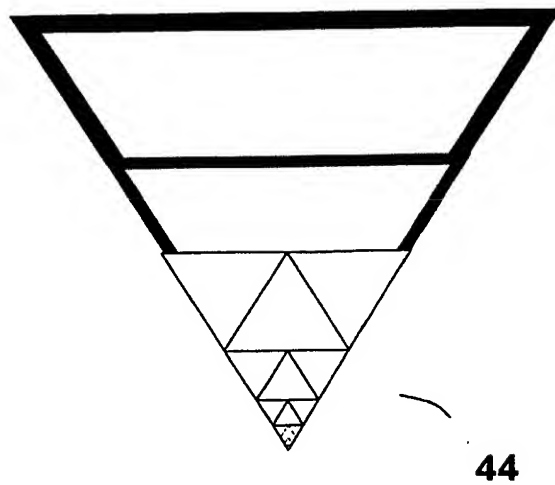
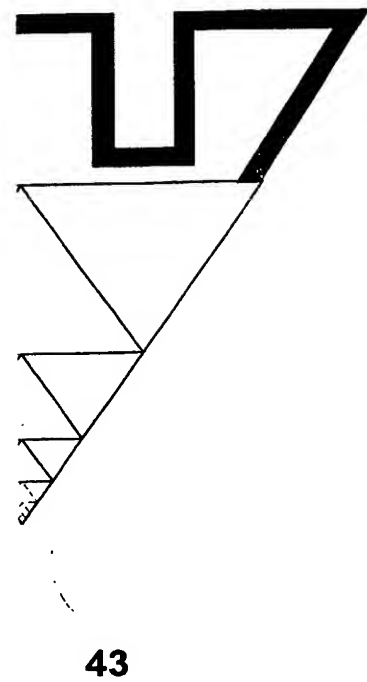
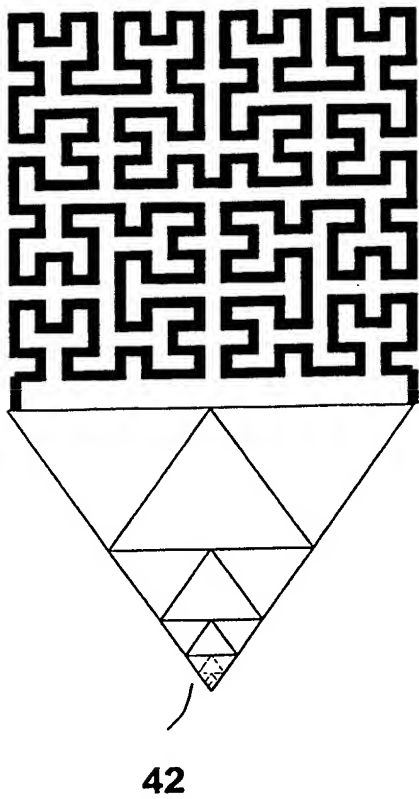



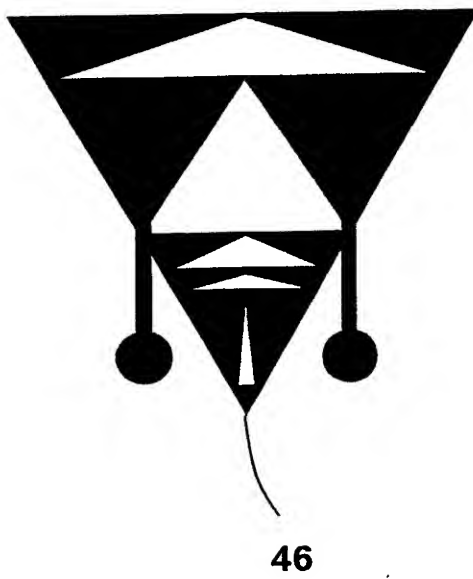


Fig.8

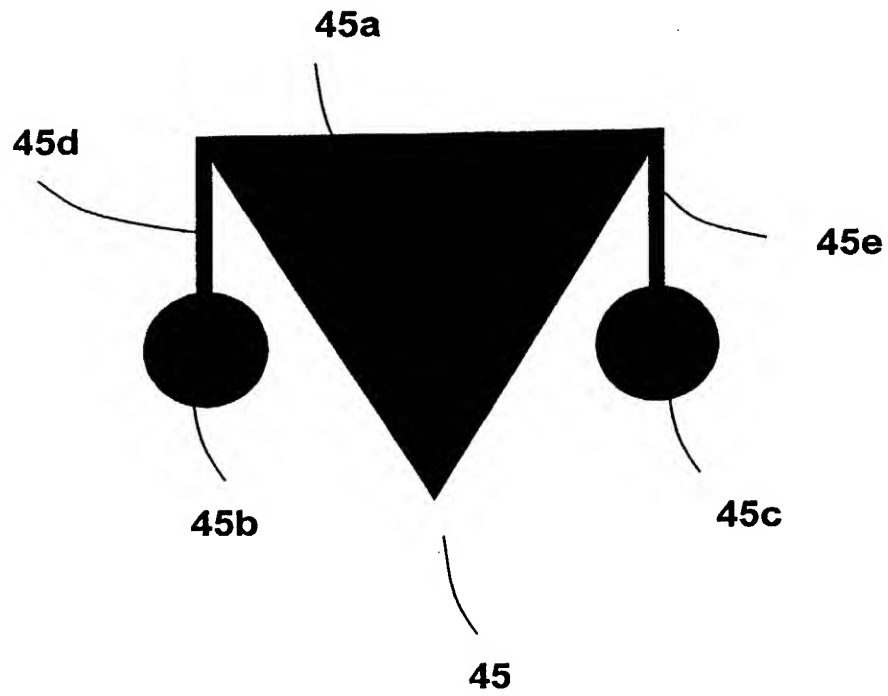


9/15

Fig.9




10/15

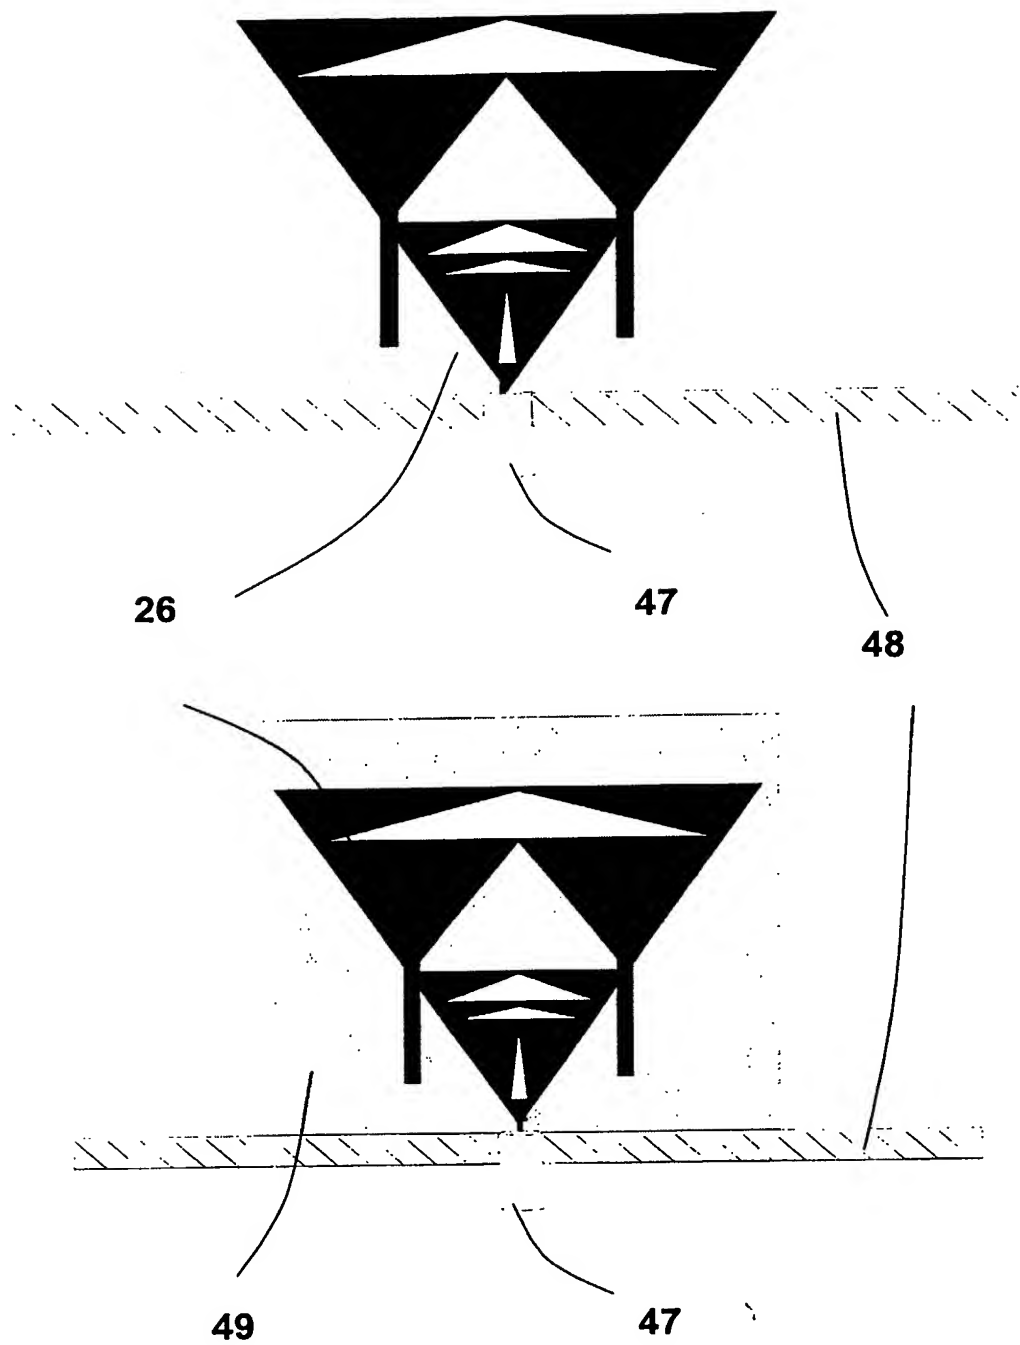Fig.10



11/15

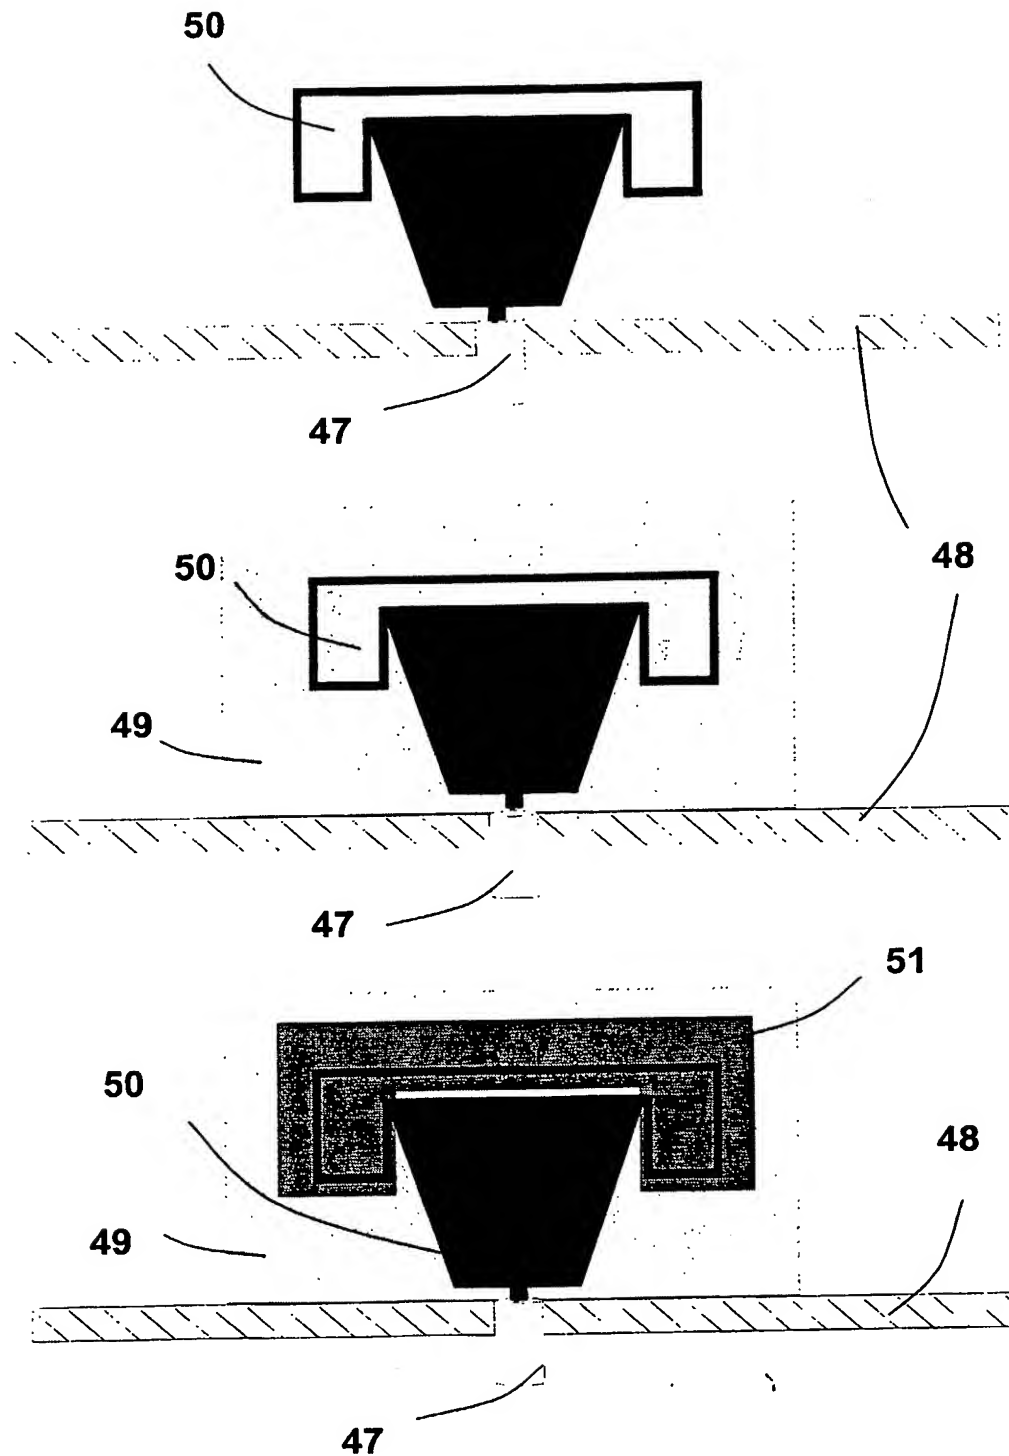Fig.11



12/15

Fig.12

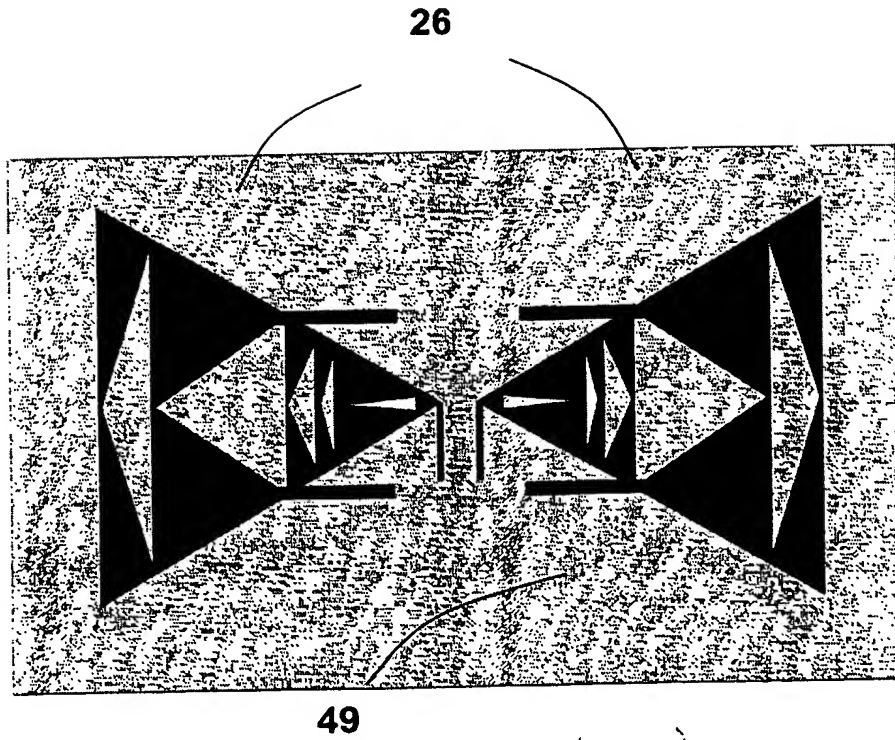
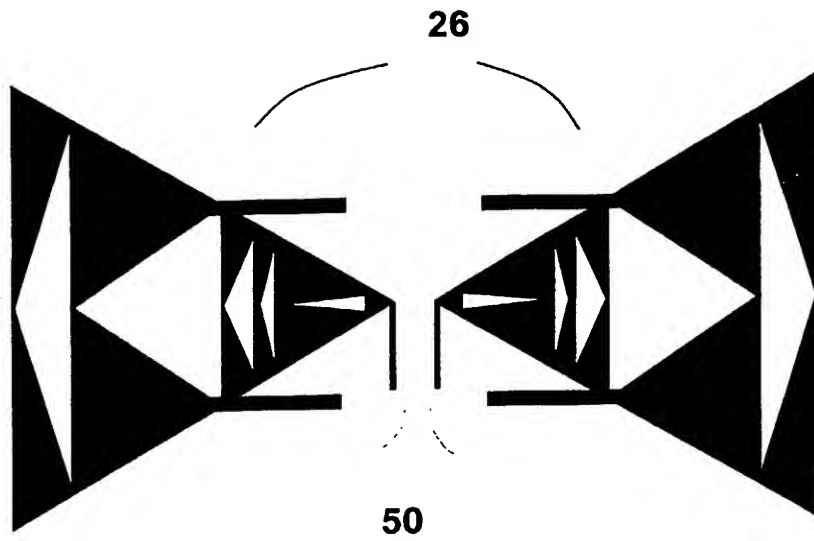


Fig.13

13/15

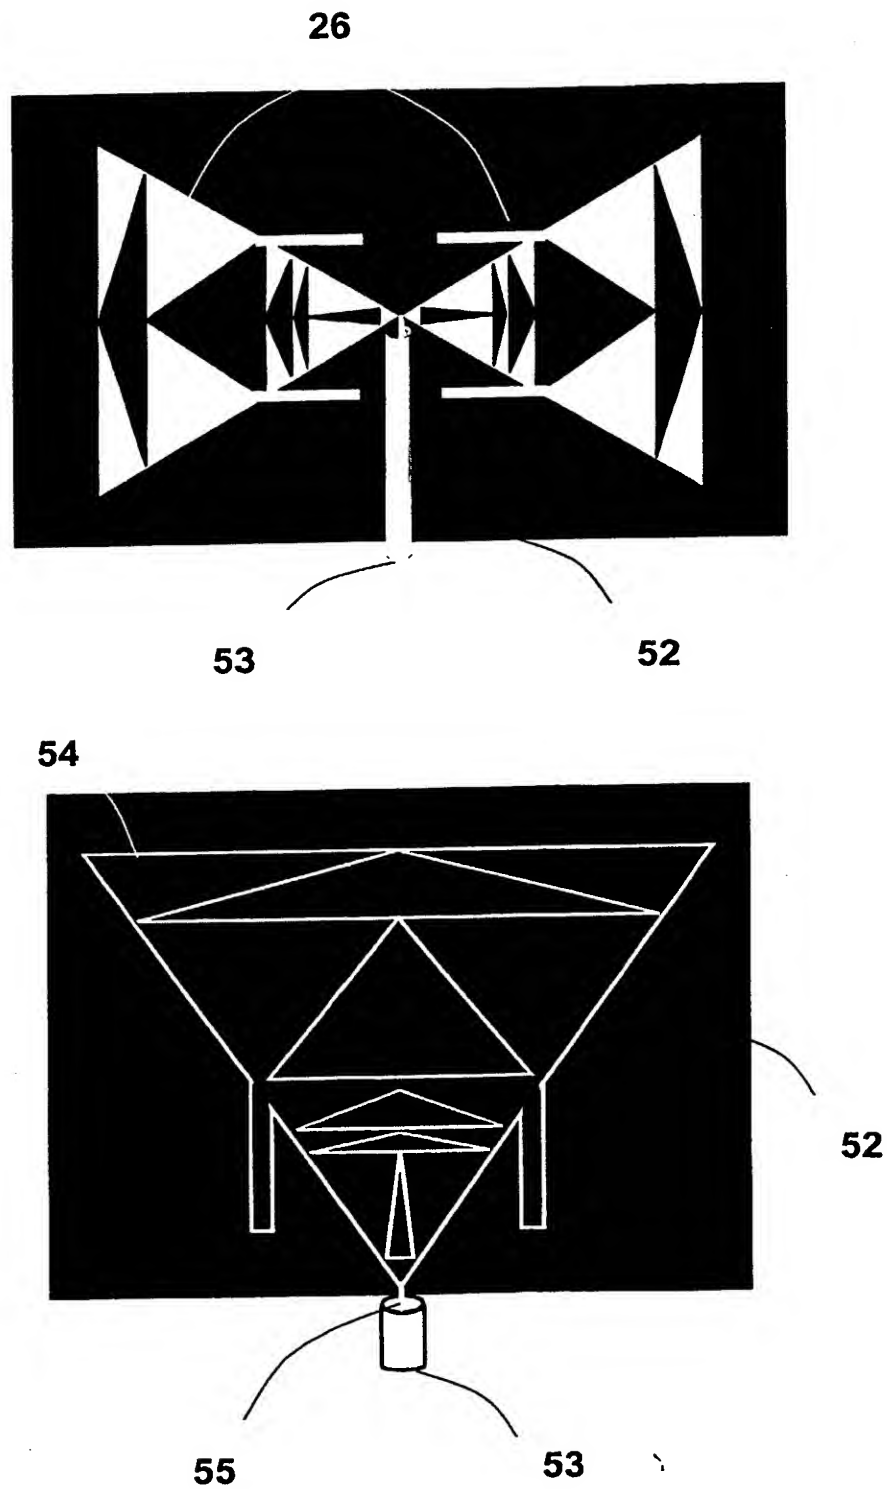


Fig.14

14/15

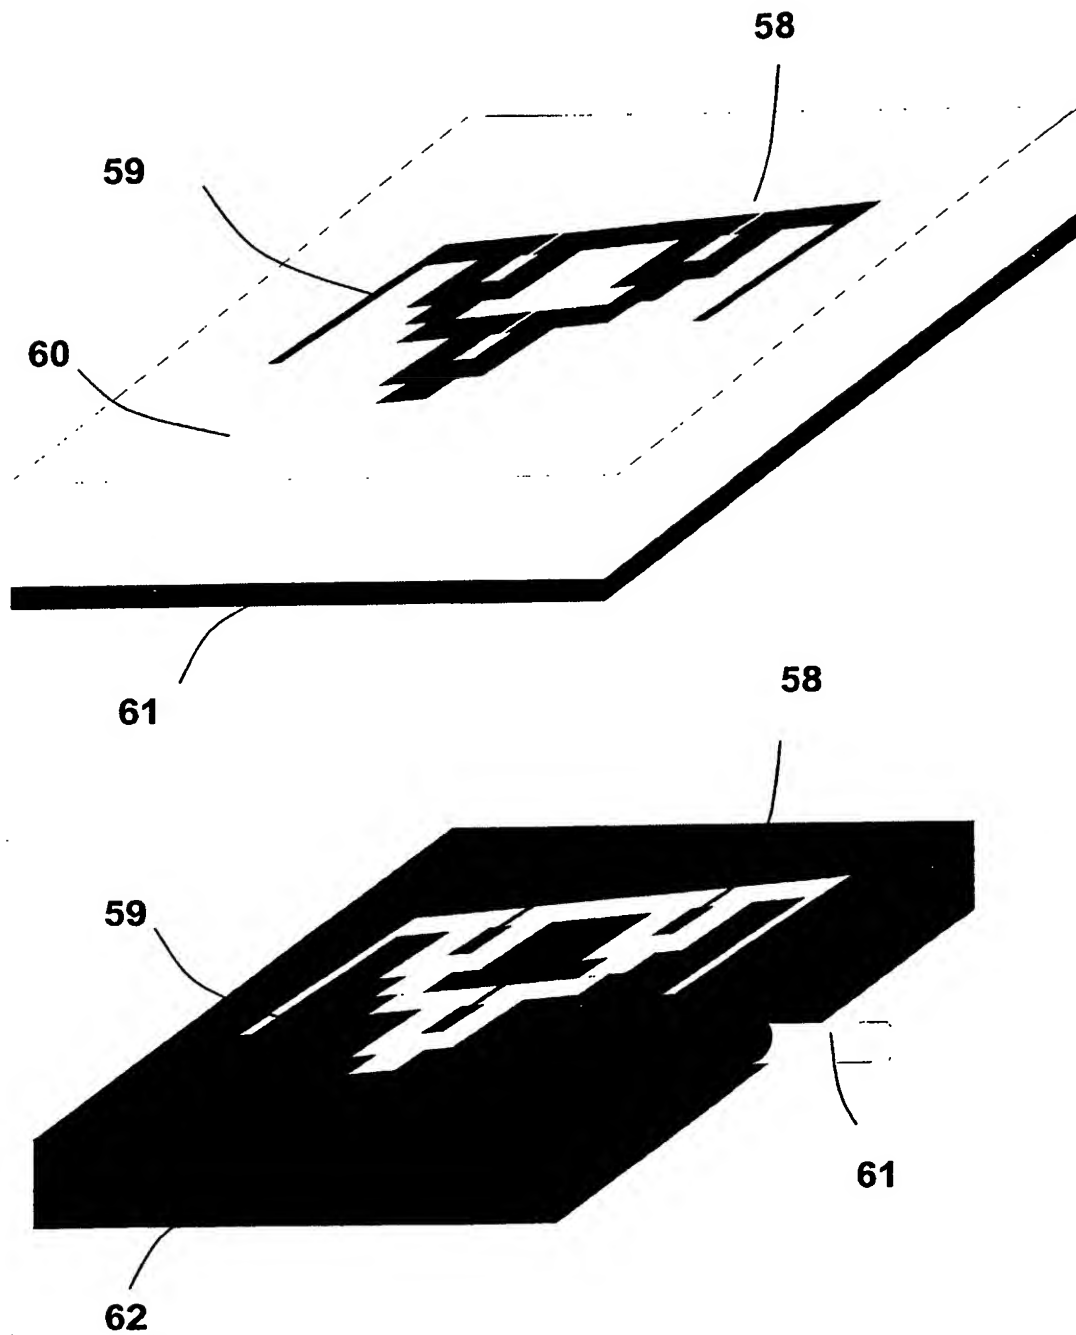


Fig.15

15/15

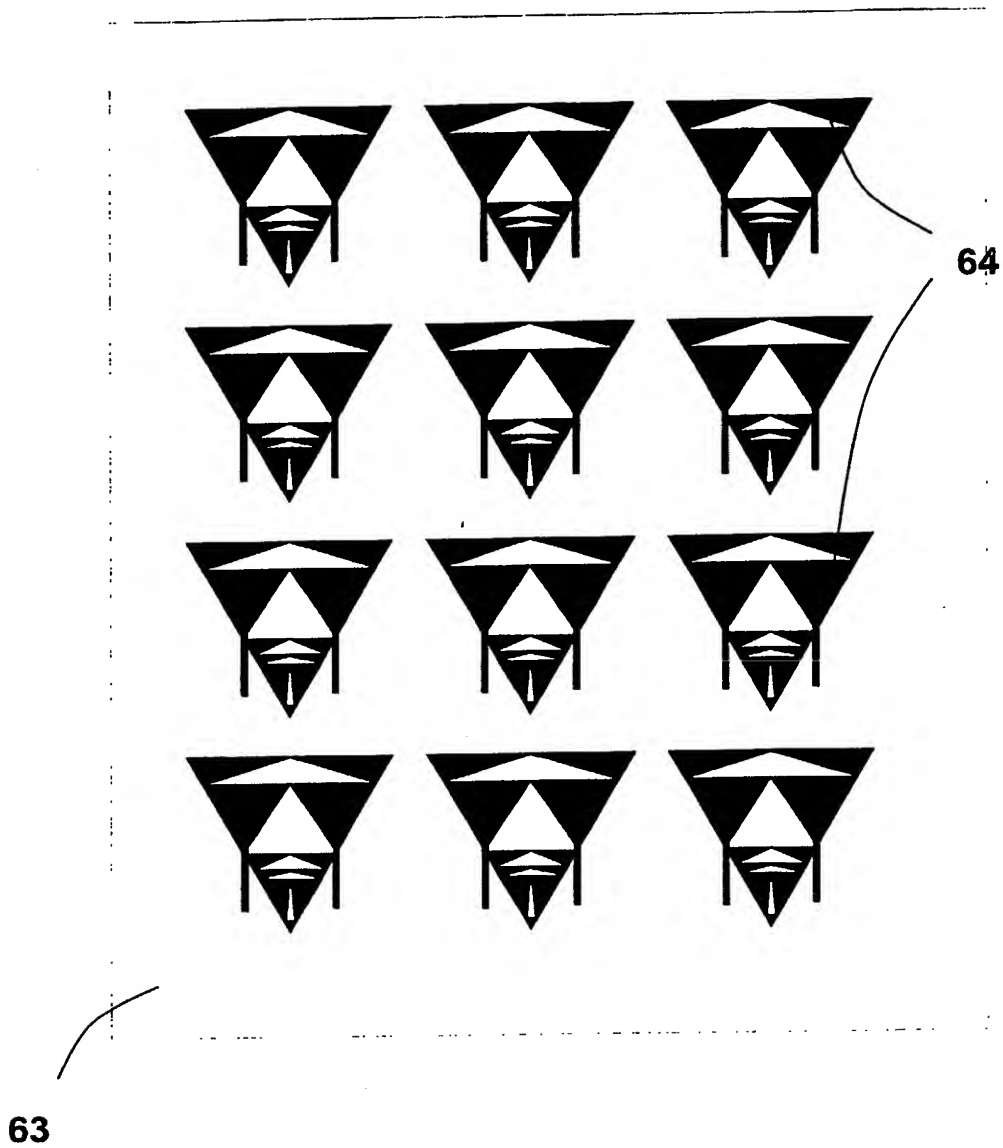


Fig.16